


1c simplex (SM) armored optic fiber patch cord

ARMORED PATCH CORD




SC-SC
SC-FC
SC-LC
SC-FC
LC-LC
FC-FC

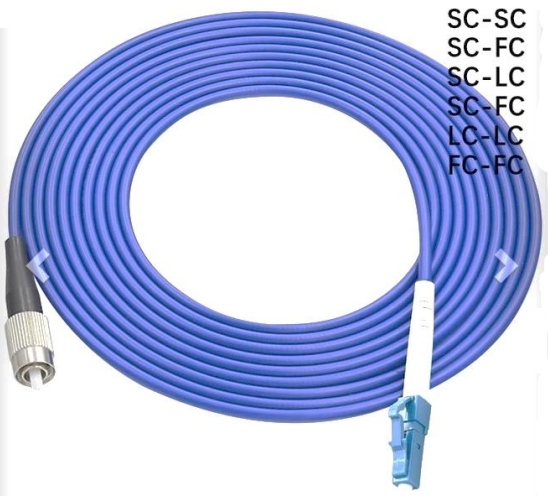

SC-SC
SC-FC
SC-LC
SC-FC
LC-LC
FC-FC



SC-SC
SC-FC
SC-LC
SC-FC
LC-LC
FC-FC

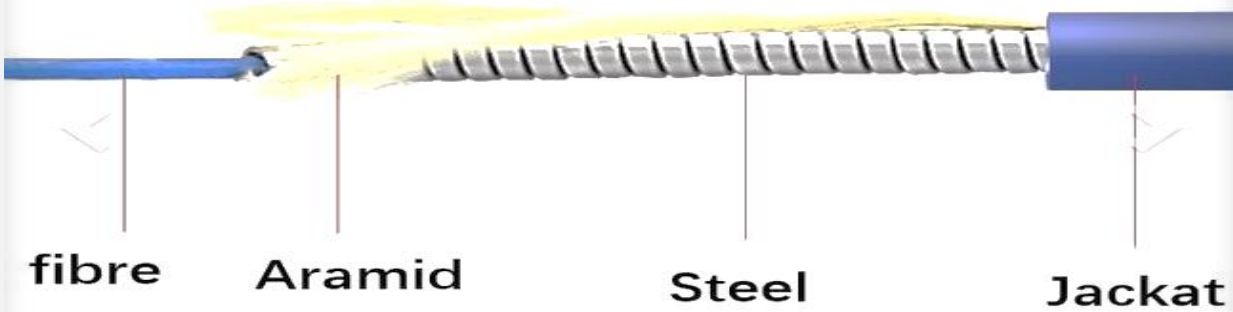

fibre

Aramid

Steel

Jacket

| Characteristics | | |
|------------------------------|----------------|---------------------|
| Cable characteristics | Units | |
| Cable material | | LSZH/PVC |
| Cable diameter | mm | 1F (3) & 2F (3.3) |
| Cable strength | | Aramid + steel mesh |
| Max. crush resistance | N/100mm | 3000 |
| Max. tensile load | N | 300 |
| Operating Temperature | Degree Celsius | -25 to + 70 |