




		SMS: Short Message Storage	25 records	
		SMSP: SMS Parameters	2 records	
		LND: Last Number Dialed	5 records	
		SDN: Service Dialing Numbers	1 record	
		PLMNsel: PLMN Selector	2 PLMNs	
14	<b>File Contents</b>			
15	<b>OTA Keys</b>	Number of OTA Keys required : 03 Generation of OTA Keys: Triple DES (recommended)                      Random		

16	<b>Electrical Personalization</b>		
	1.	PIN1 (CHV1)	Status Enabled (PIN check supported) Disabled (PIN check not supported) Value 0000
	2.	PUK1 (UCHV1)	Value RANDOM
	3.	PIN2 (CHV2)	Value RANDOM
	4.	PUK2 (UCHV2)	Value RANDOM
	5.	Ki	Randomly generated by SIM Vendor
	6.	ACC	Last digit of IMSI (Default) = ACC0 – ACC9
17	<b>Optical Personalization Specification</b>		
			QUARTER CARD

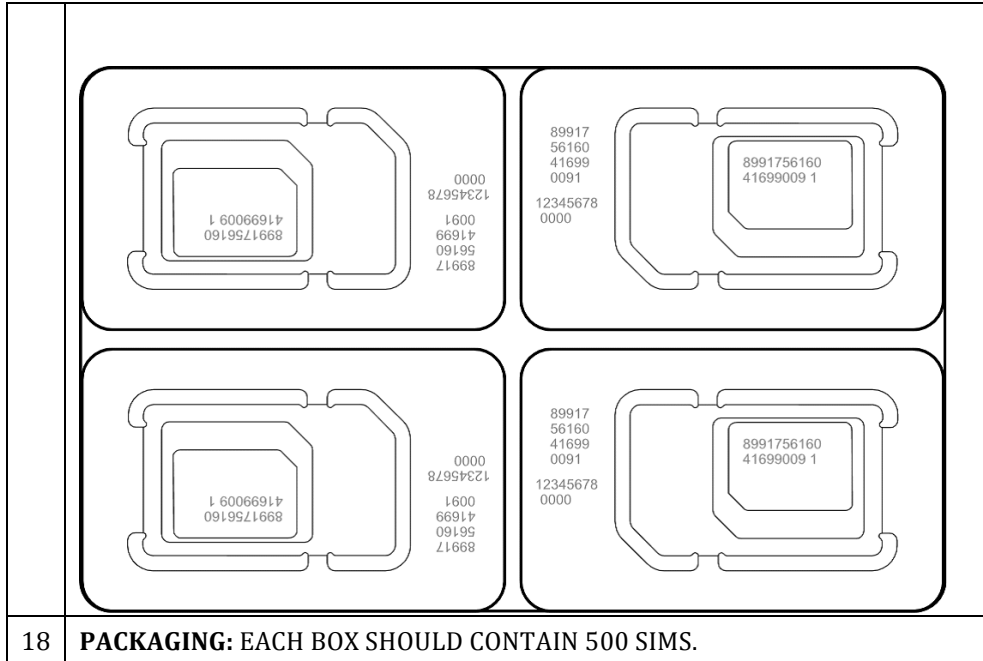

18 **PACKAGING:** EACH BOX SHOULD CONTAIN 500 SIMS.

- Material Type** : Standard PVC/ABS
- Card Dimension** : As per ISO Standard 7816
- Surface** : Glossy
- Color** : Multi color,4x4-2x2
- Plug-in-size** : All in One i.e. 2FF+3FF+4FF (Re-pluggable)
- GSM SAS** : GSM Security Accreditation Scheme Certified
- ISO 27001** : ISO 27001 Certified
- ISO 14001** : ISO 14001 Certified
- ISO 9001** : ISO 9001 Certified