

**GENERAL TOLERANCE :**

Reinforcement M.S. Tube : Thickness  $+/-$  0.2 mm  
Width / Depth :  $+/-$  2.0 mm

BWR Ply : Thickness  $+/-$  1.0 mm

ISMB : LENGTH  $+/-$  6.0 mm

**DIMENSION :**

EXT : 3600x2600x2500 mm


INT : 3480x2480x2380 mm

PANEL THICKNESS : 60 mm


SKIN : 0.6mm PPGI SHEET - RAL 9002 (OUTER)  
: 0.6mm PPGI SHEET - RAL 9002 (INNER)


FLASHING : 0.8mm PPGI L-ANGLES (OUTER)  
2.0mm ALU. L-ANGLES (INNER)


ALL DIMENSIONS ARE IN mm

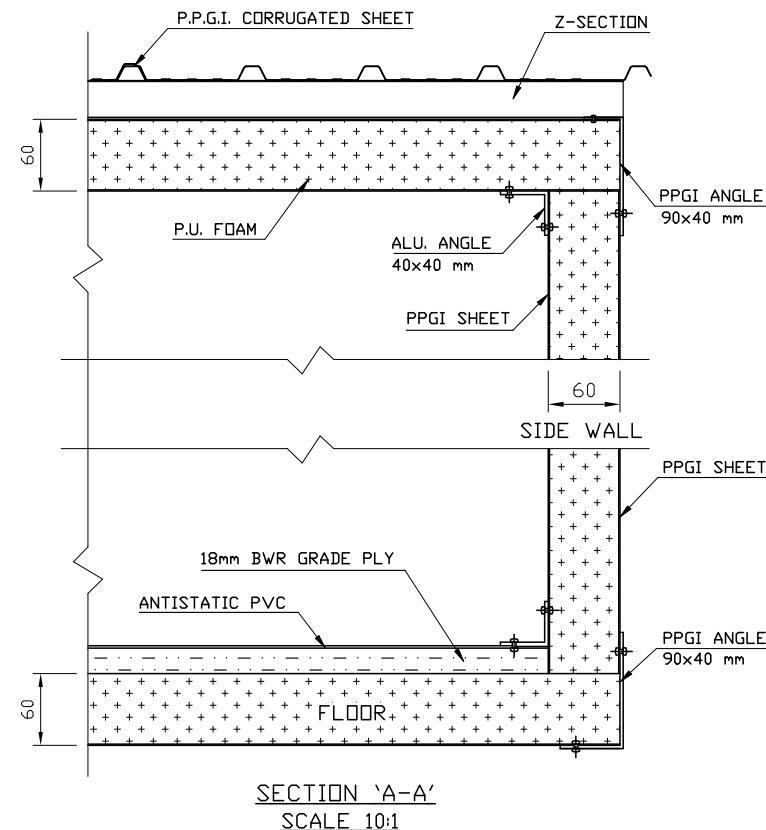



BHUTAN TELECOM LIMITED

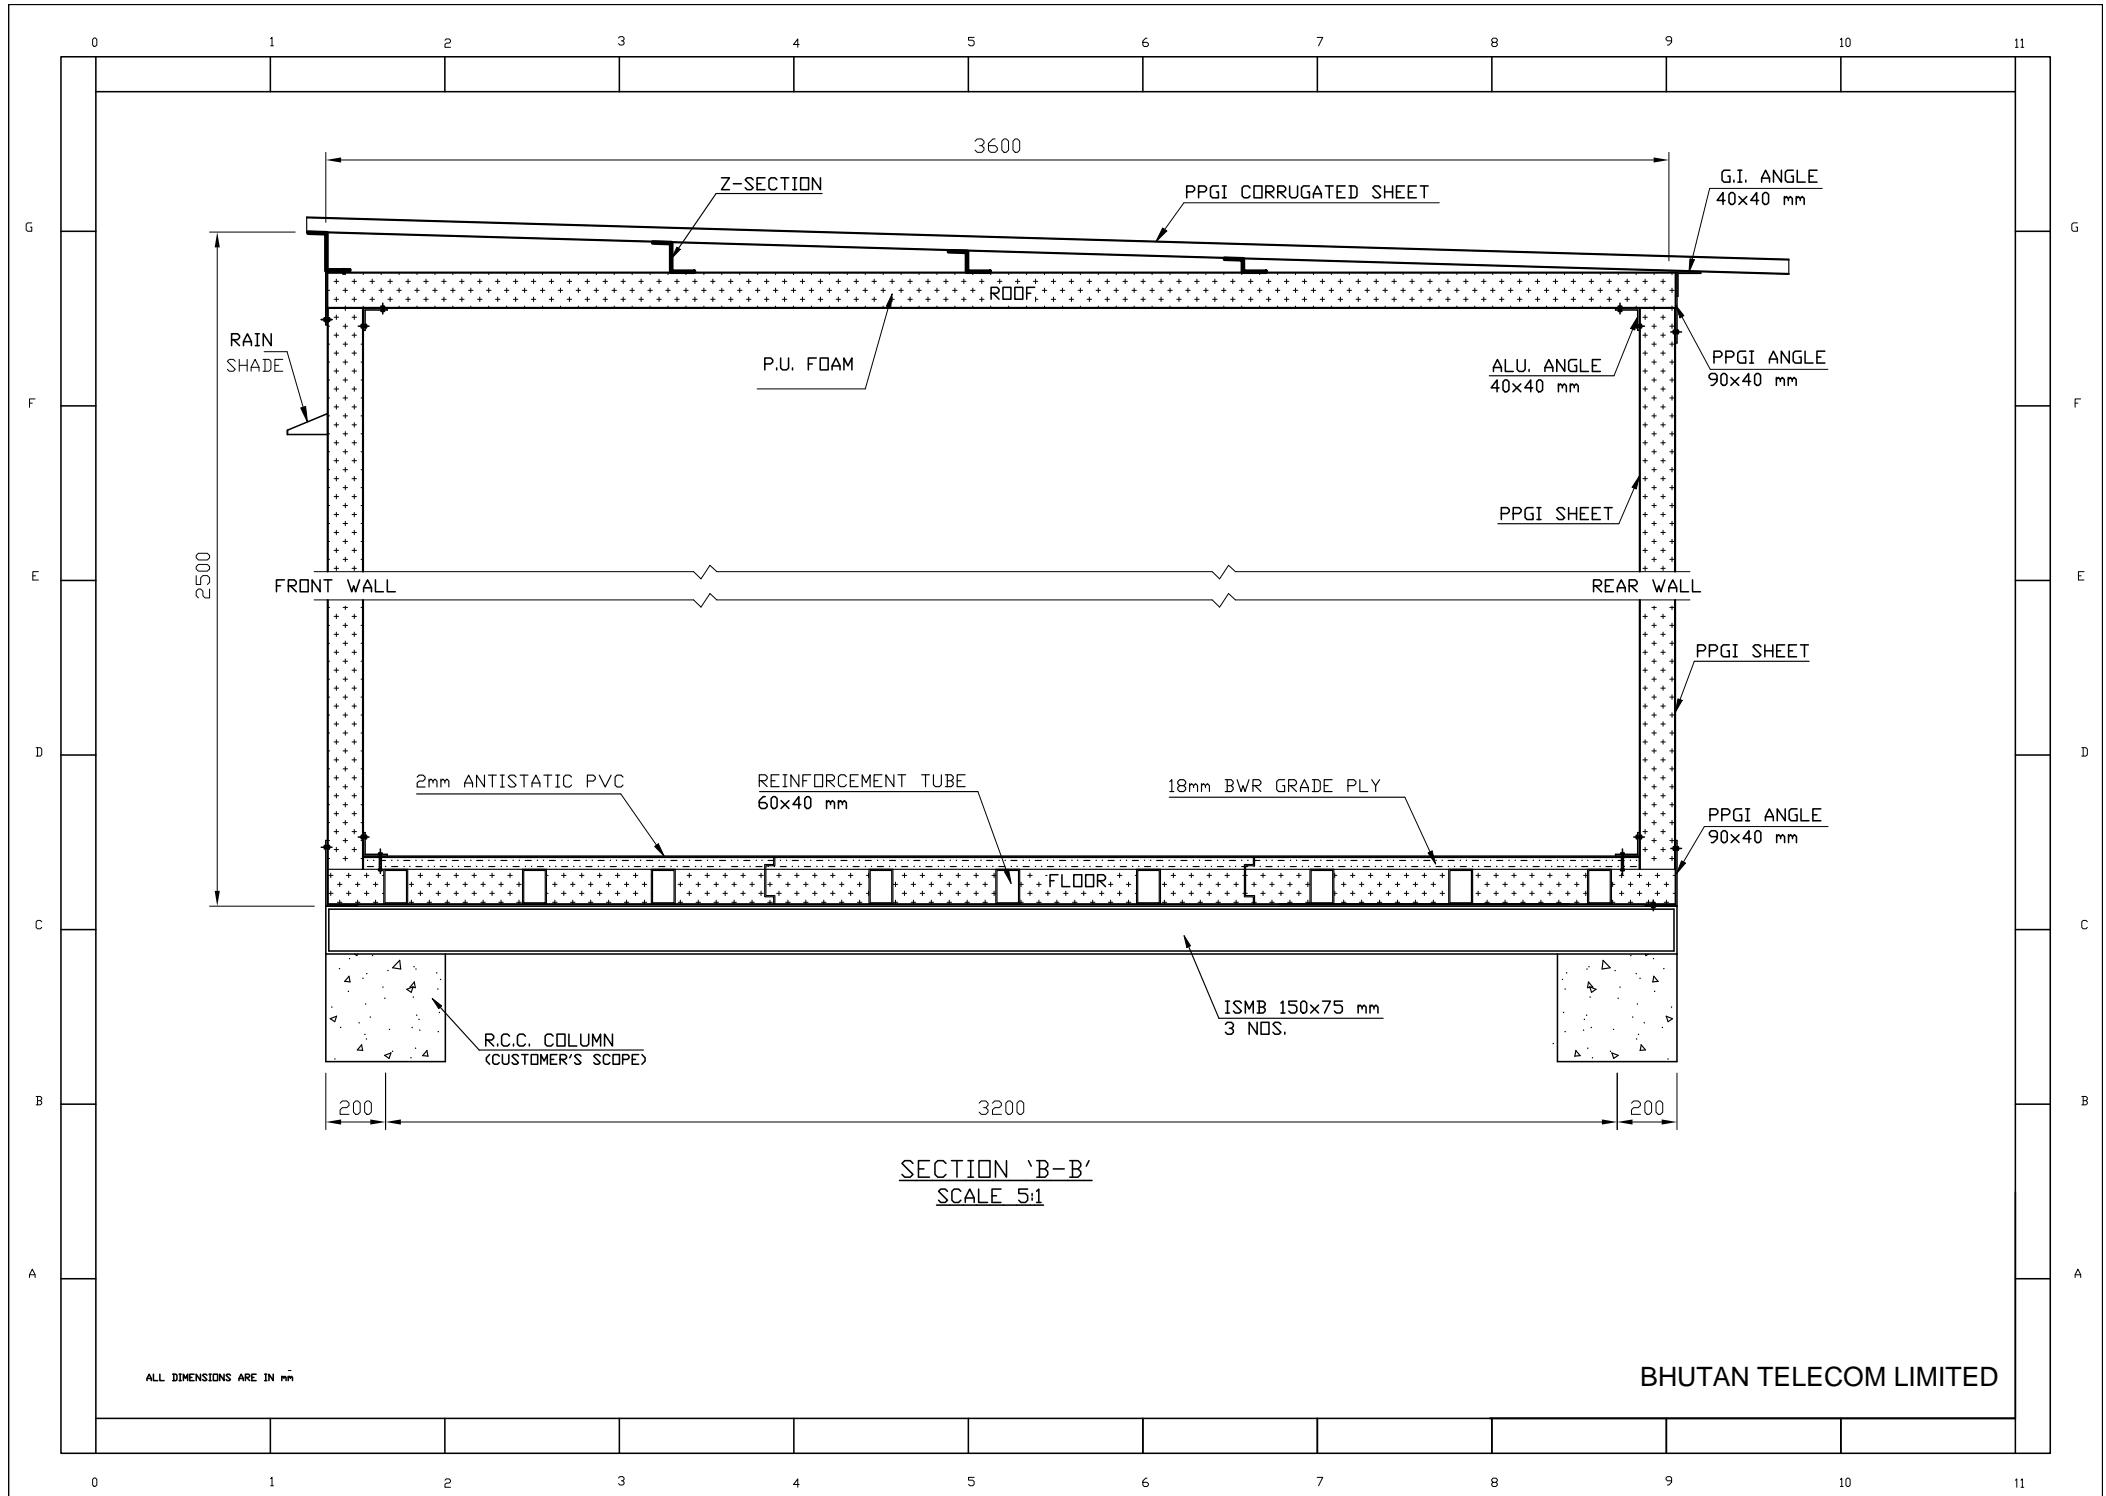

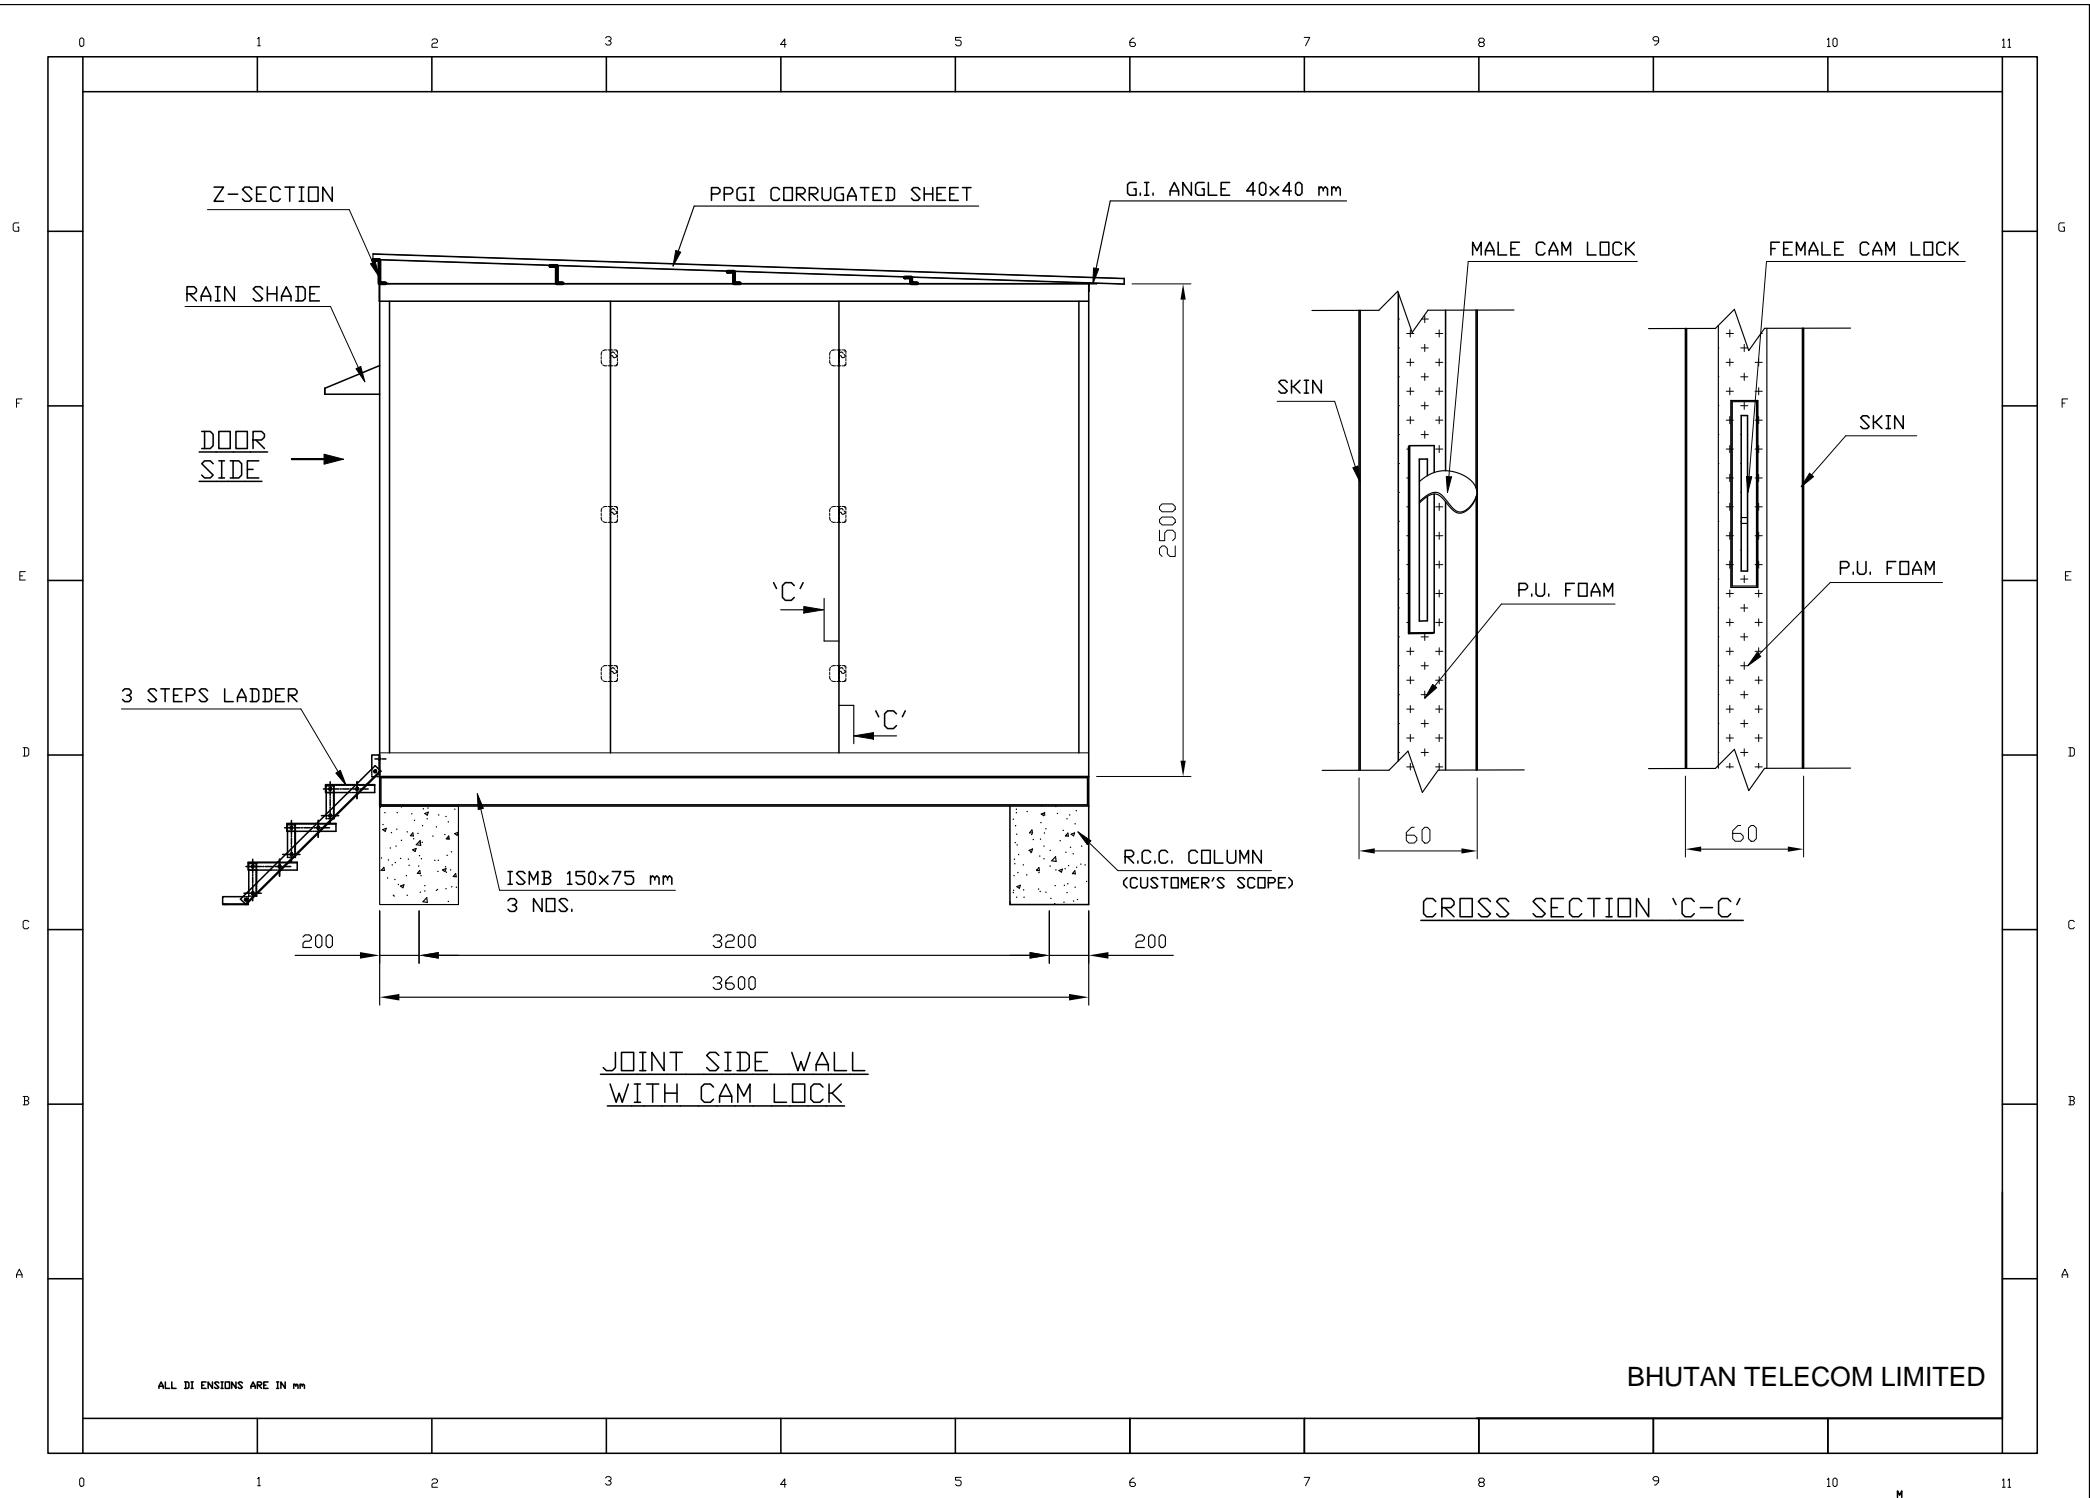

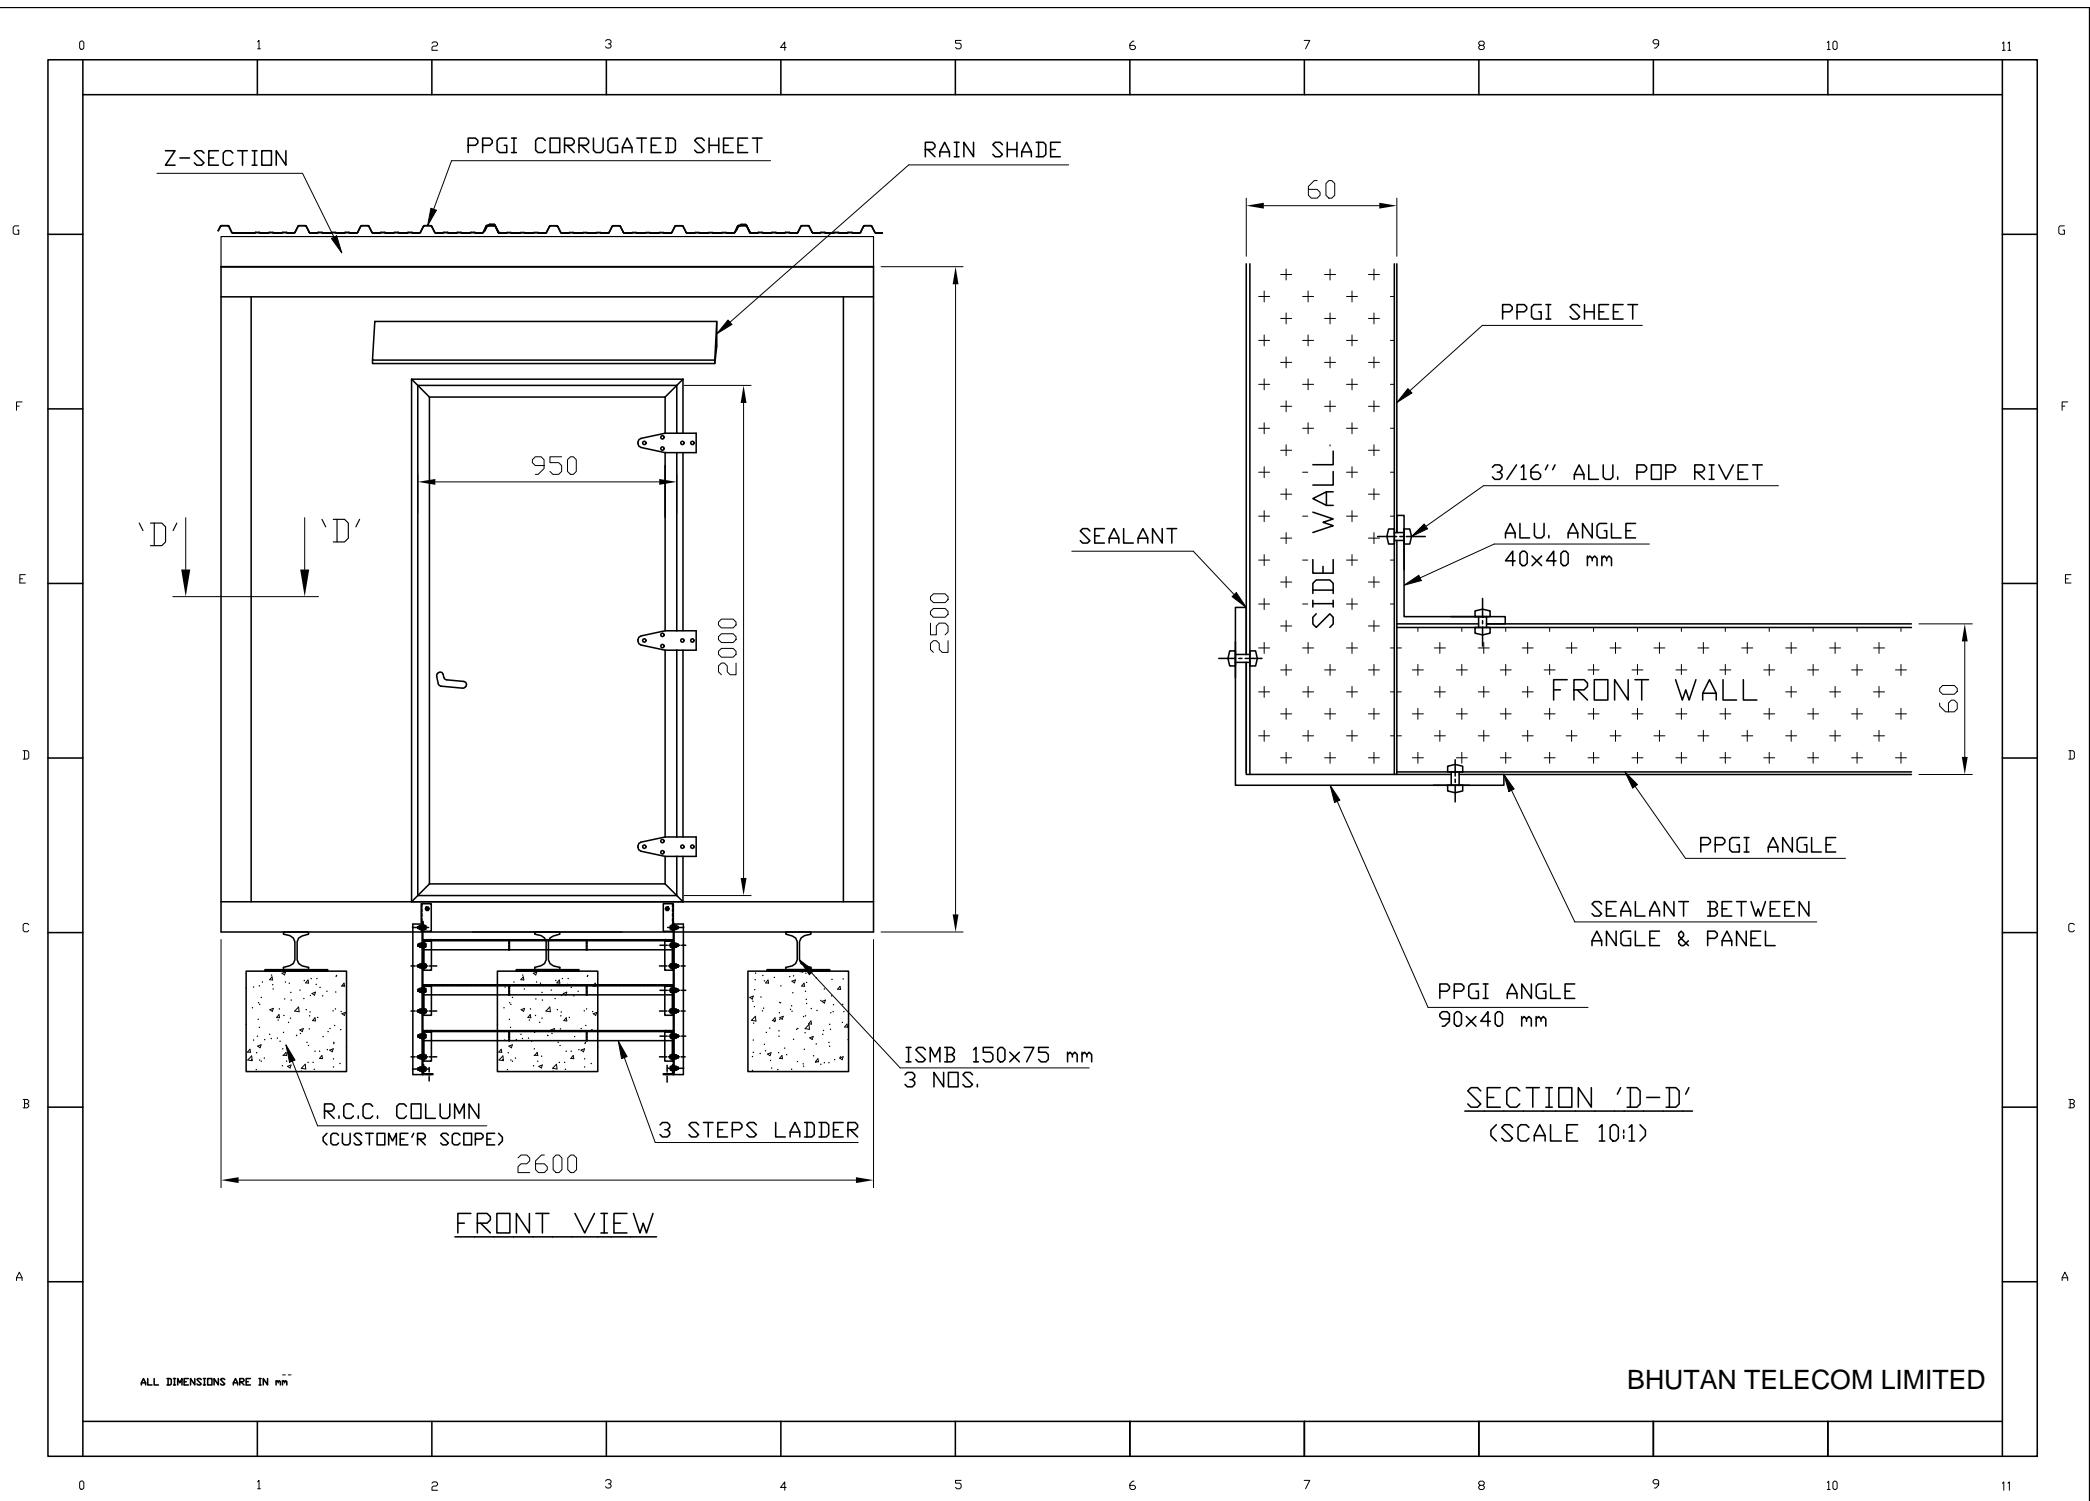


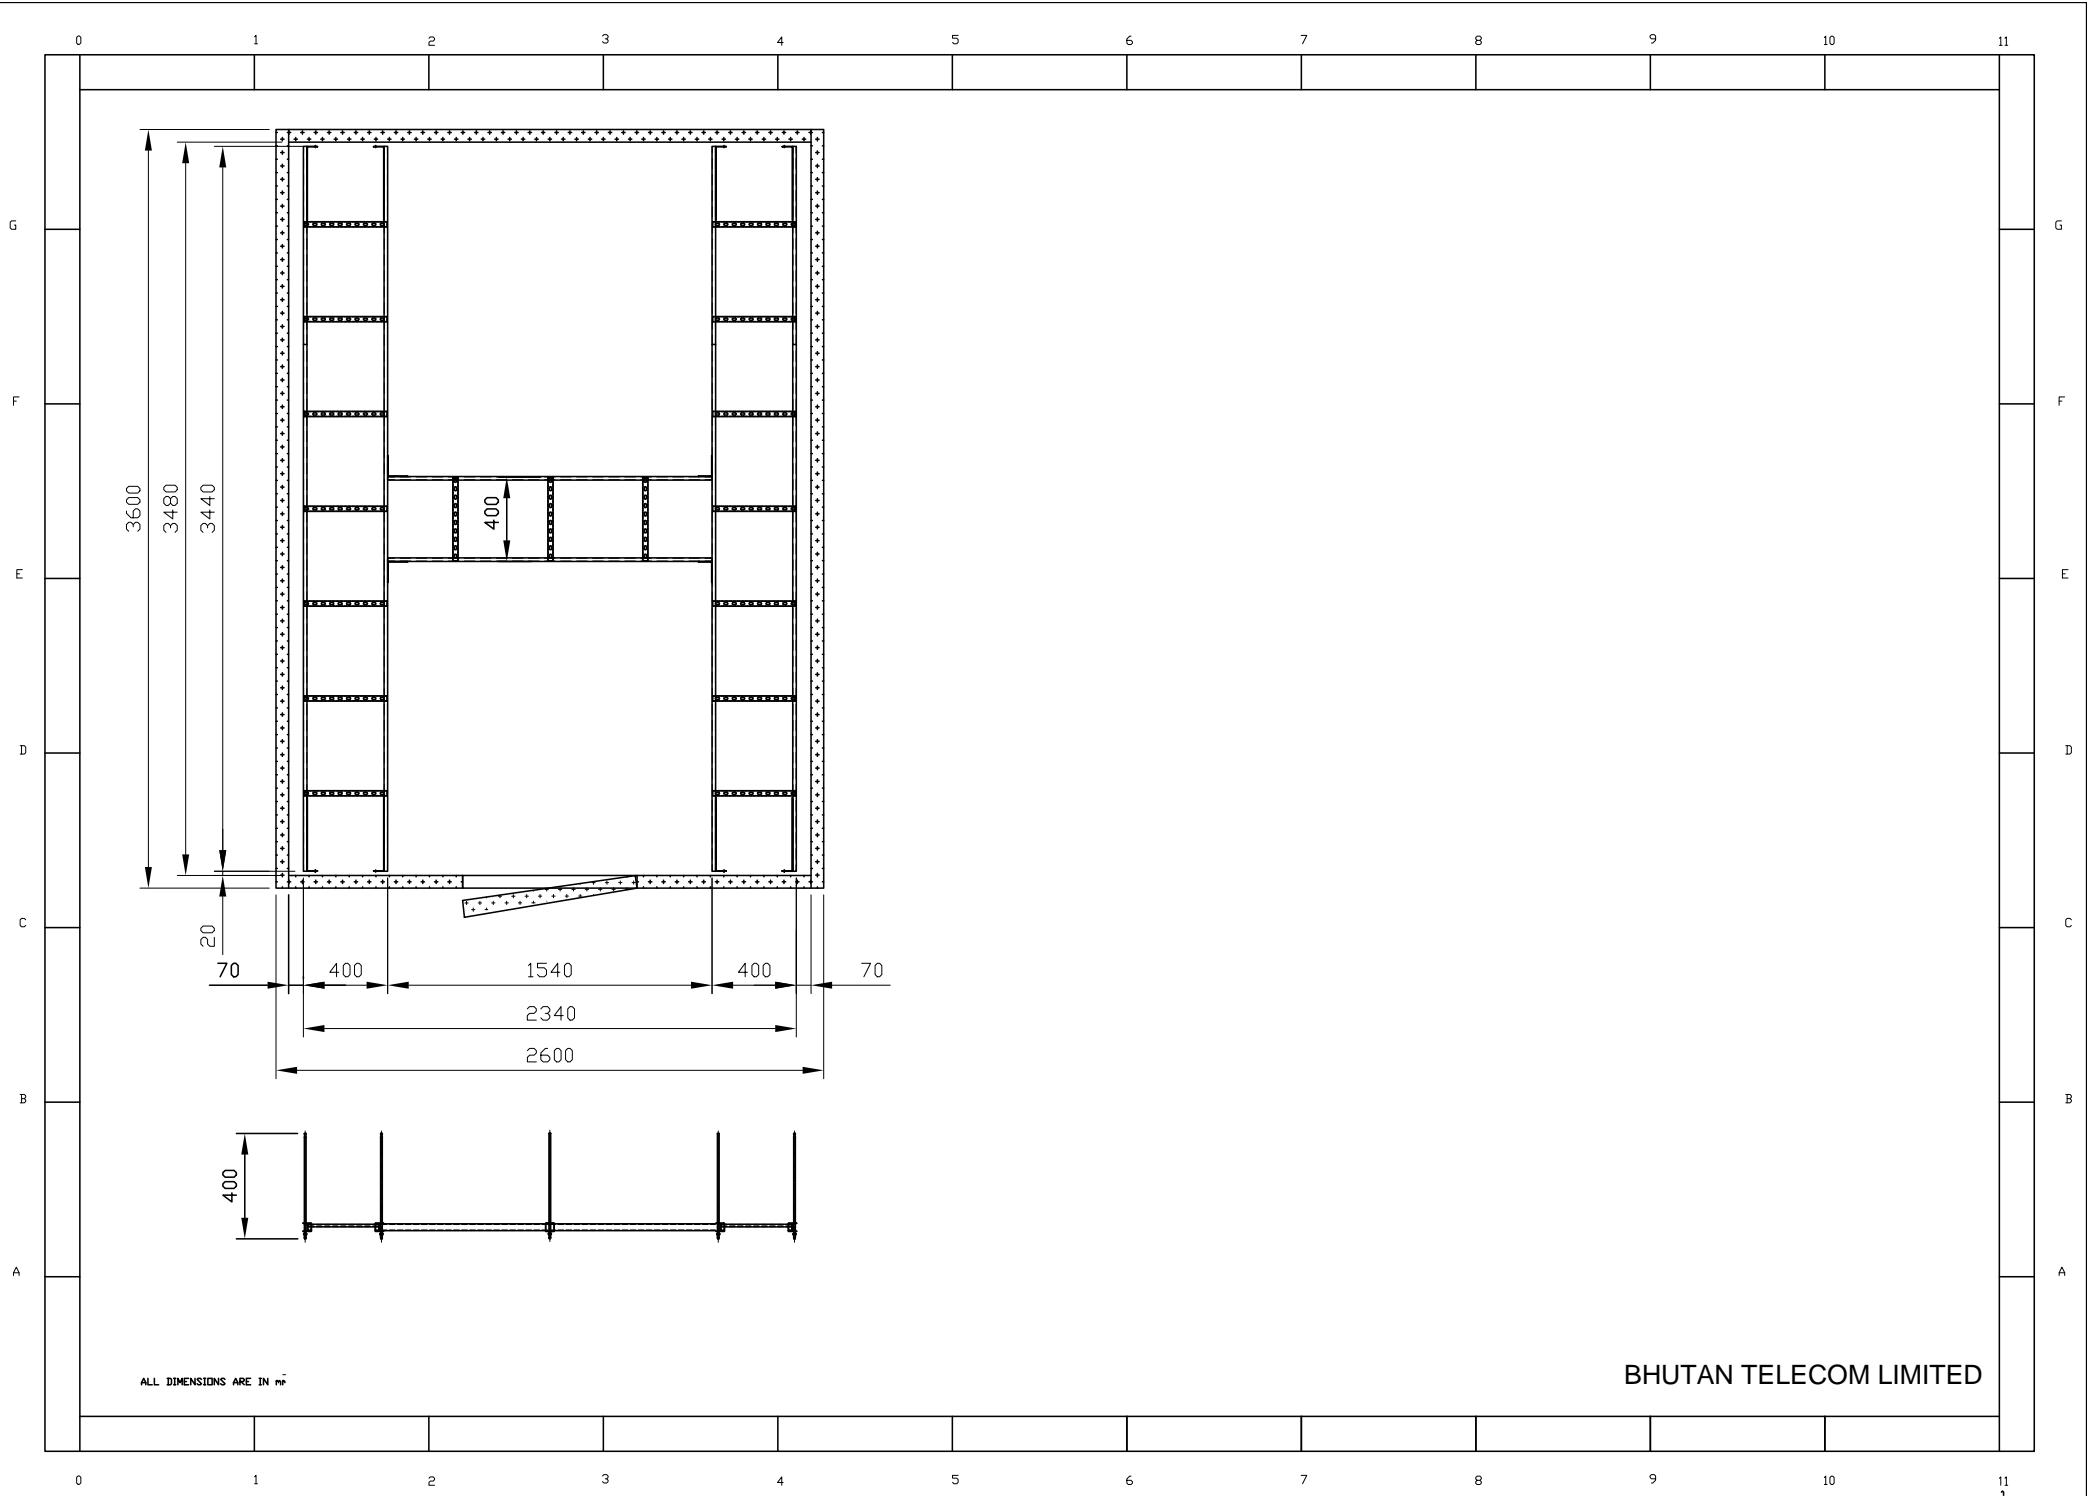

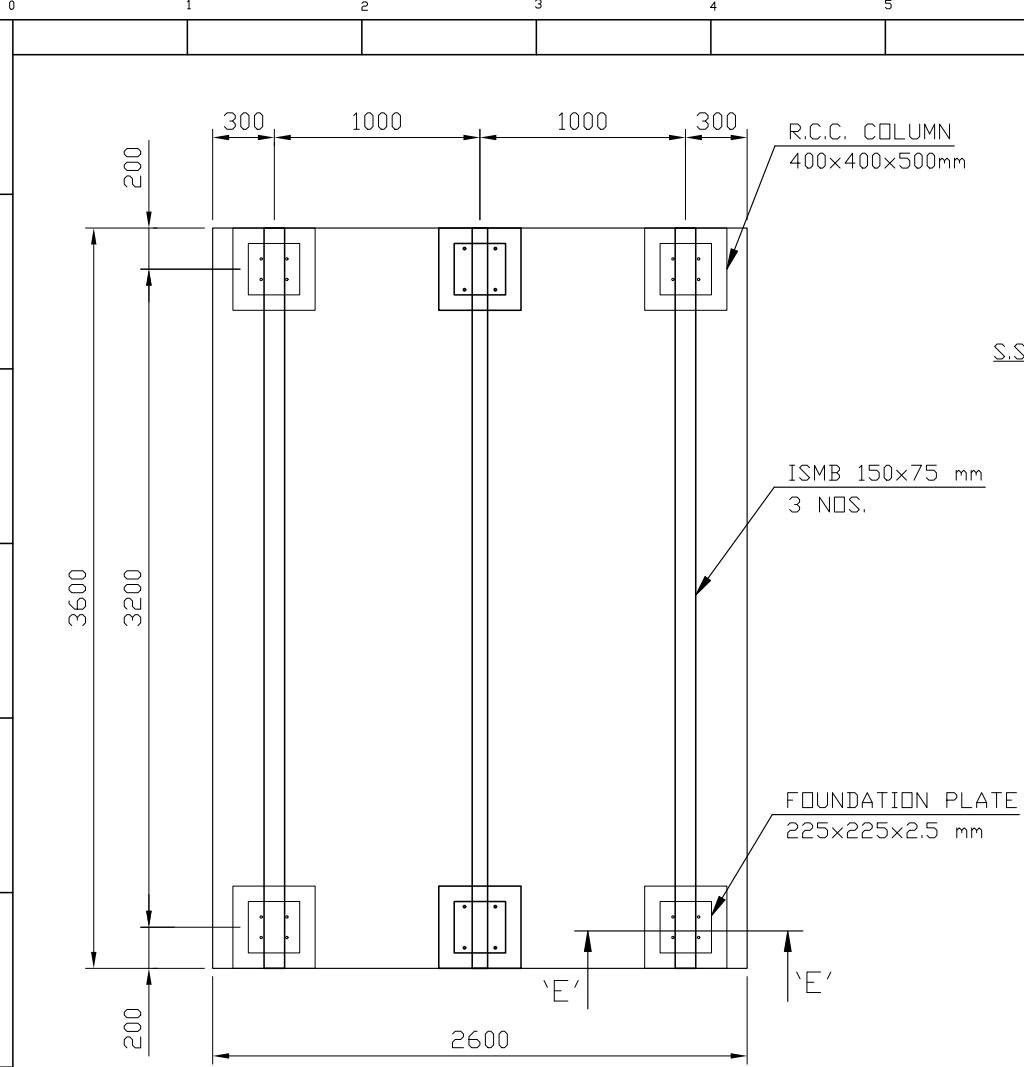

FOUNDATION PLAN

ALL DIMENSIONS ARE IN mm

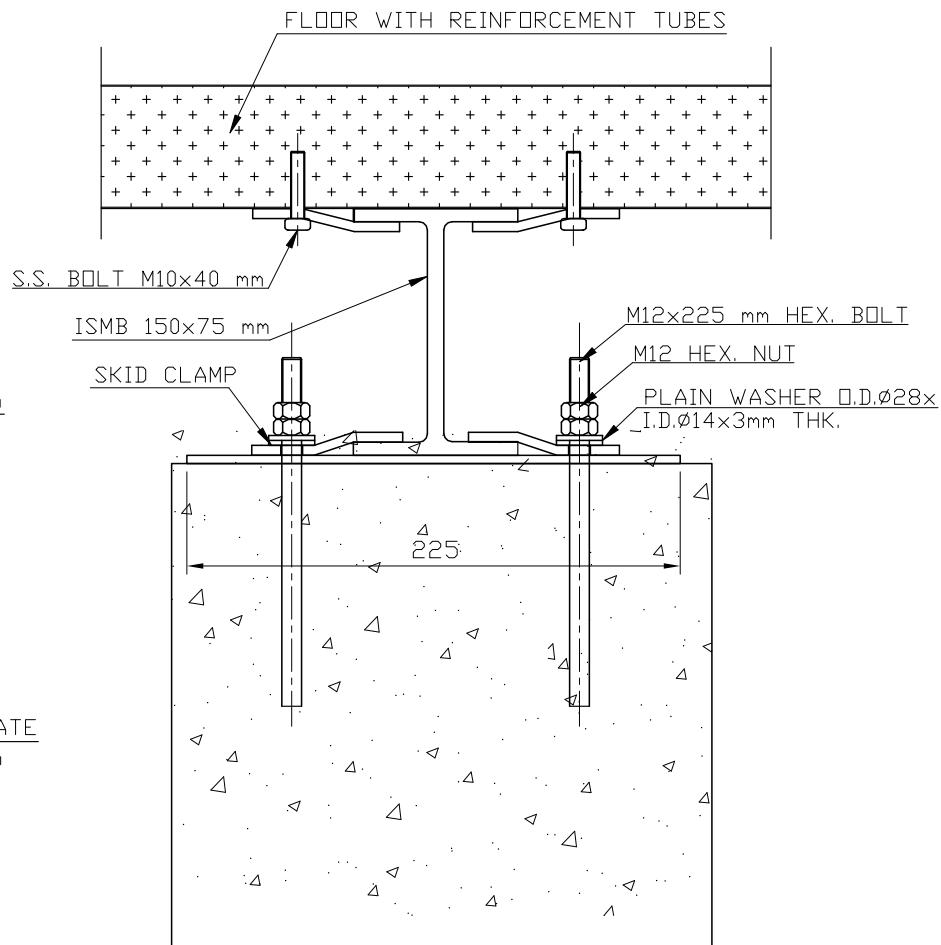

BHUTAN TELECOM LIMITED